

Daikin Gas Tight Joint (DGT)

Non-brazed connection for
Refrigerant piping

Size
Ø12.7 ~
Ø28.6

Size
Ø6.4 ~
Ø9.5





Daikin Gas Tight Joint (DGT)

Benefits

- Daikin Gas Tight Joint (DGT) is non-brazed connection for refrigerant piping
- Enhanced safety with no brazing required
- Time saving with easy fitting installation
- Less labour intensive
- No Hot Work Permit application is required

DGT
Marker



Lineup

Model Name	Size (mm)
BDGTA06	Ø6.4
BDGTA09	Ø9.5
BDGTA12	Ø12.7
BDGTA15	Ø15.9
BDGTA19	Ø19.1
BDGTA22	Ø22.2
BDGTA28	Ø28.6

Specification


Item	Value
Applicable Refrigerant	R32, R410A, R407C and other HFC Refrigerant
Applicable Refrigerant Oil	Ether oil, Ester oil, Polyol ester oil, Polyalkylene glycol oil
Maximum Pressure	4.3Mpa
Minimum Pressure	-755mmHg
Maximum Temperature	130°C
Minimum Temperature	-45°C
Standard	ISO14903

Note: Due to our policy of innovation, all product specifications are subjected to change without prior notice.

Daikin Header Pack

Benefits

- Connectable up to 6 indoor units
- Quick flare nut connection
- Installation time savings (1/3 of conventional)
- Safety (No fire hazard in the building)
- Space savings (Attic height reduction by 300mm)

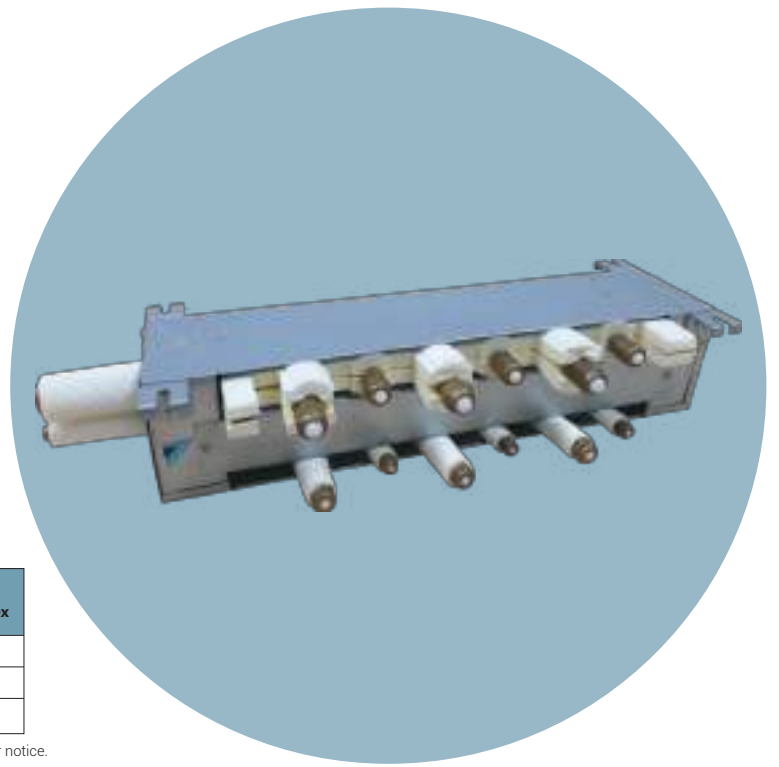

Header Pack Specification and Lineup

Model Name	HP	Piping connections (Liquid / Gas mm)		Indoor Unit Total Capacity Index
		Outdoor unit side	Indoor unit side	
BHF8RHP6	8	Ø 9.5 / Ø 19.1	(Ø 9.5 / Ø 15.9) x 3 (Ø 6.4 / Ø 12.7) x 3	150 ≤ X < 200
BHF10RHP6	10	Ø 9.5 / Ø 22.2		200 ≤ X < 290
BHF16RHP6	16	Ø 12.7 / Ø 28.6		290 ≤ X < 420

Note: Due to our policy of innovation, all product specifications are subjected to change without prior notice.

Compact




Quick



Easy



Connectable up to 6 Indoor Units

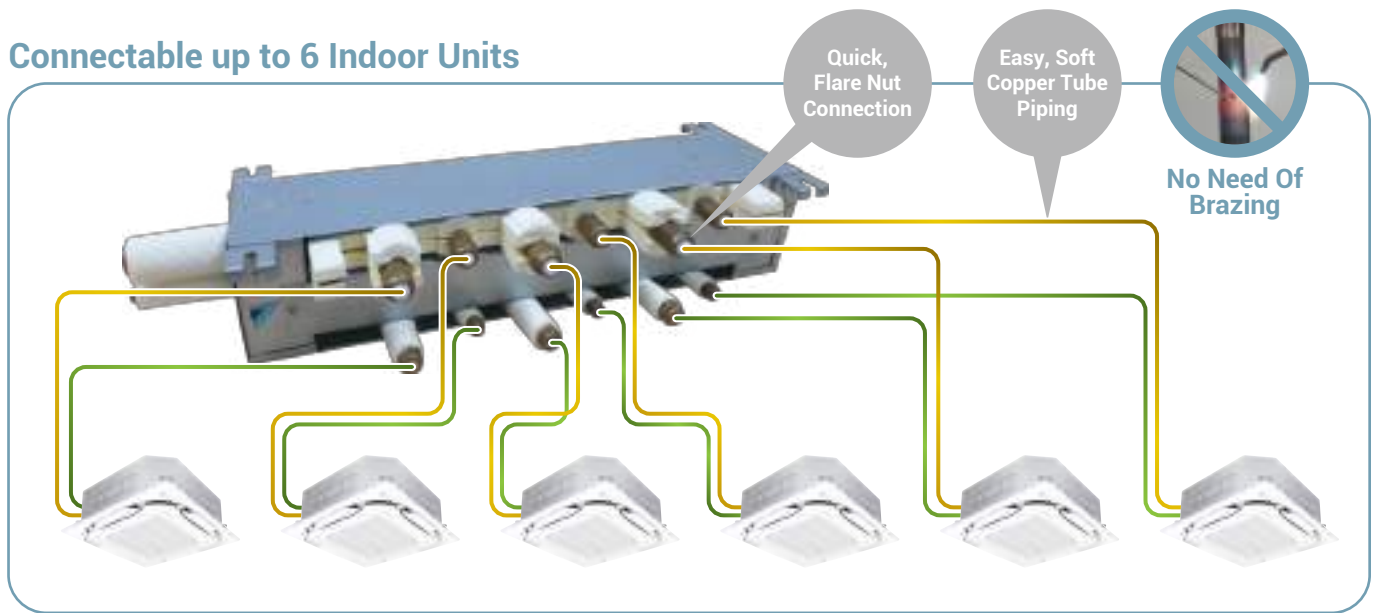


Compact design to fit into narrow attic space


Light weight and the compact body gives minimum damage on the building structure.

Higher ceiling offers luxurious and comfortable room.

● Conventional

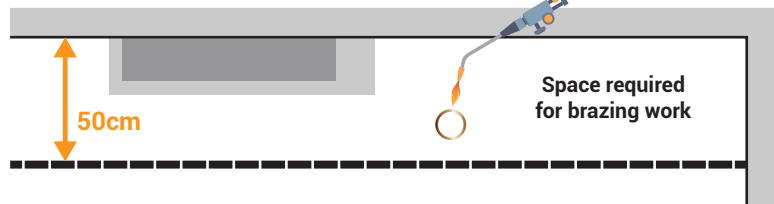

● Header Pack

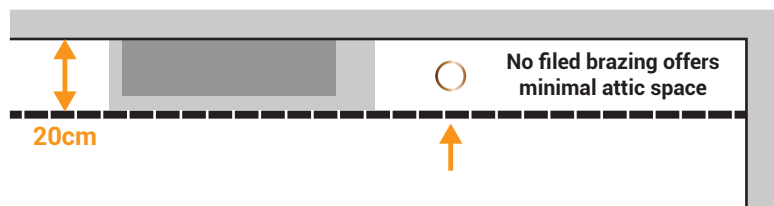

Scan This QR Code

To Learn More About Daikin Gas Tight Joint (DGT) and Header Pack



www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Head Office: Tel: 03-7953 8388 Fax: 03-7956 4371

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:

• Kedah	Tel: 04-730 5670	• Johor	Tel: 07-557 7788
• Penang	Tel: 04-331 1670	• Pahang	Tel: 09-567 6778
• Perak	Tel: 05-548 2307	• Kelantan	Tel: 09-747 4578
• Negeri Sembilan	Tel: 06-768 8969	• Sabah	Tel: 088-722 194
• Melaka	Tel: 06-288 1133	• Sarawak	Tel: 082-333 299

Authorized dealer: